



Remote charge converter for high temp sensors

Model 2771CM2




Key features

- Designed for use with extreme high temp sensors (1200°F, 650°C)
- Wide frequency response
- Broadband noise down to 5 μ Vrms
- Rugged small package
- Supports IEEE P1451.4 for smart sensors (TEDS)
- Radiation hardened

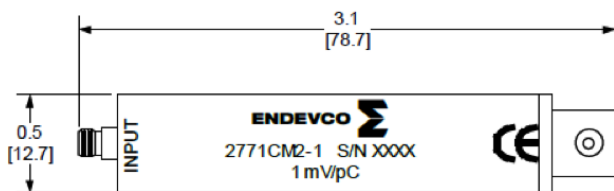

Outline drawing

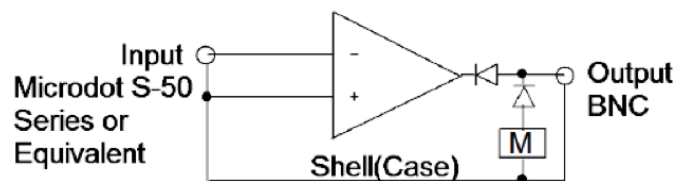

Block Diagram

The model 2771CM2 remote charge converter, is designed to operate with high temperature piezoelectric transducers that have low impedance when exposed to very high temperatures (1200°F, 650°C). The device converts the transducers charge output to a proportional voltage.

This unit is a two-wire device with the output signal available on the same two wires that carry the supply current from the constant current power supply.

The 2771CM2 supports IEEE P1451.4 (A Smart Transducer Interface for Sensors and Actuators) and contains an identification code via TEDS (Transducer Electronics Data Sheet). The charge transducer identification, actual unit gain and calibration data are stored in the TEDS (256-bit Non-volatile memory).

This unit features a fixed gain of 1.0 mV/pC, low noise and operational over a constant current range of 4 to 20 mA and a temperature range of -40°C to +125°C.

Remote charge converter for high temp sensors

Model 2771CM2

Specifications

Input characteristics

Input connection	Single ended with one side connected to signal ground.
Source resistance (min)	10 KOhm
Source capacitance (max)	20 nF
Input range	±5000pC

Output characteristics

Output connections	Single ended with one side connected to signal ground.	
Output impedance (max)	50 Ohm	
DC output bias	+11.5 to +16.0 VDC	
Output voltage (max)	10V pk-pk	
Broadband noise, 1 Hz to 10 kHz	10 µV rms max	
Spectral density noise, µV/Hz	1 Hz	6
	10 Hz	1.3
	100 Hz	0.1
	1 kHz	0.04
	10 kHz	0.04

Transfer characteristics

Gain accuracy	±2.5%
Frequency response [±5%] [1]	3 Hz to 30 KHz
Gain stability with source capacitance	0.1% per 1 nF source capacitance at the input.
Gain stability with temperature	±1% referred to the +25°C gain over the temperature range of -40°C to +100°C.
Gain stability with power	0.01% per mA with changes in supply current over the range of 4 to 20 mA.
Total harmonic distortion	<1%
Current requirement	4 to 20 mA
Voltage supply	+24 to +30 VDC
Warm up time	30 seconds to meet 10 V pk-pk output voltage.

Physical

Dimensions	See outline drawing
Weight (max)	2.0 oz
Case material	Stainless steel, with Teflon® sleeve for isolation
Input connector	Microdot connector, S-50 series or equivalent
Output connector	BNC Coaxial female connector


Environmental

Temperature	
Operating temperature	-40°C to +125°C [-40°F to 257°F]
Digital communications	-40°C to 85°C [-40°F to 185°F]
Storage temperature	-65°C to +125°C [-76°F to + 257°F]
Humidity	The unit will withstand 95% relative humidity
Vibration	20g pk level with frequency sweep from 55 Hz to 2kHz
Shock	100g pk amplitude with 3.6 ms haversine pulse
Radiation	1.0 MRads (integrated Gamma)
Compliance	Industrial CE Class A, RoHS

Remote charge converter for high temp sensors

Model 2771CM2

Model number definition

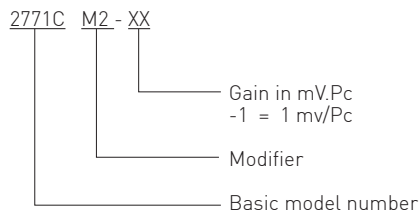

Notes:

1. Low end frequency response is a function of input source resistance. Stated value is at a source resistance = 10KΩ. For source resistance = 28kΩ, low end frequency response (+/-5%) = 7Hz. For source resistance >28KΩ, low end frequency response (+/-5%) = 10 Hz
2. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Contact

ENDEVCO

www.endevco.com

Tel: +1 (866) ENDEVCO

[+1 (866) 363-3826]