


# Miniature TEDS accelerometer

## Model 27F11 / F12

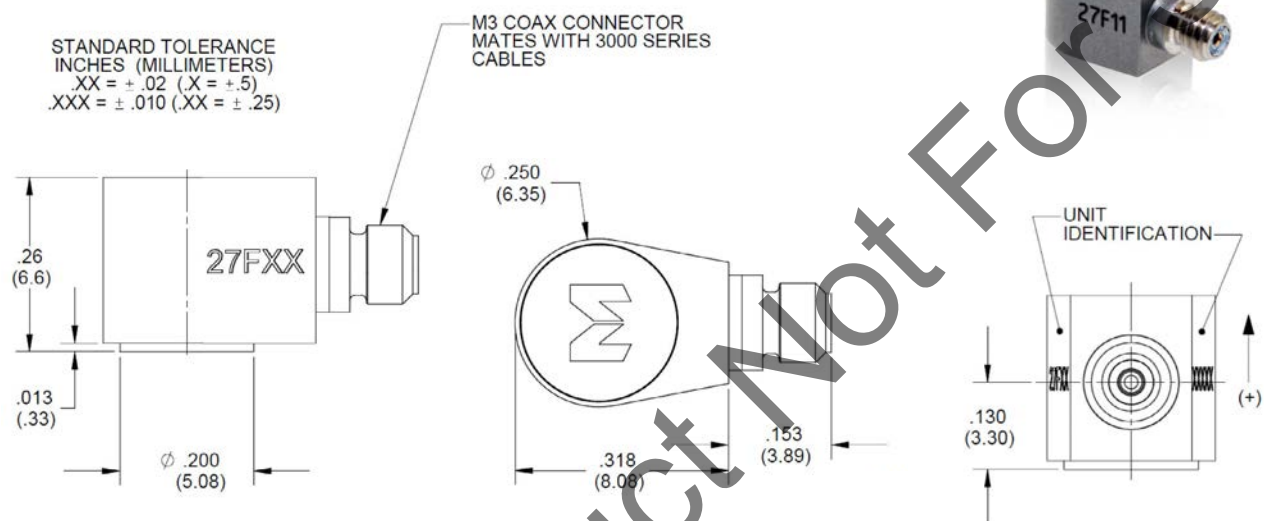

### Key features

- Miniature teardrop IEPE accelerometer
- IEEE P1451.4 TEDS v0.9
- Adhesive mounted
- Hermetically sealed
- Wide bandwidth

### Description

Model 27FXX is a miniature IEPE accelerometer with IEEE P1451.4 Transducer Electronic Data Sheet (TEDS), designed specifically for measuring vibration on mini-structures and small objects. The accelerometer offers a high resonance frequency and wide bandwidth and its light weight effectively eliminates mass loading of the test structure. A field replaceable miniature cable is supplied standard with each unit.

The Model 27FXX features an annular shear design, which exhibits excellent output sensitivity stability over time. These accelerometers incorporate an internal hybrid signal conditioner in a two-wire system, which transmits its low impedance voltage output through the same cable that supplies the constant current power. The signal ground of the accelerometer is connected to the case. If electrical case isolation is needed, an isolation mounting pad is included. Additionally, a tool is included in the package to assist with the proper removal of the accelerometer from its mounting surface.

The model number suffix identifies the range and sensitivity, where 27F11 indicates a 10 mV/g sensitivity, 500 g range unit, and 27F12 indicates a 100 mV/g sensitivity, 50 g range unit.

## Miniature TEDS accelerometer | Model 27F11 / F12

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST) is supplied.

Specifications			
Dynamic characteristics	Units	27F11	27F12
Range	g	±500	±50
Voltage sensitivity			
Typical	mV/g	10	100
Minimum	mV/g	9	90
Maximum	mV/g	11	110
Frequency response			
Resonance frequency			
Typical	kHz		50
Minimum	kHz		45
Amplitude response			
±10%	Hz	2 to 10000	3 to 10000
±3 dB	Hz	1.0 to 15000	1.5 to 15000
Phase response			
<5°	Hz	4 to 40000	10 to 2500
Sensitivity deviation over temperature			
At -67°F (-55°C), min/max	%		0 / -15
At +257°F (+125°C), min or max	%		+10 / -5
Transverse sensitivity	%		<5
Amplitude linearity	%		<2
Electrical characteristics			
Output polarity		Acceleration directed into the base produces positive output	
DC output bias voltage [1]			
Room temperature, +75°F (+24°C)	Vdc		+11.0 to +14.0
67°F to +257°F (-55°C to +125°C)	Vdc		+7.5 to +16.0
Output impedance	Ω		<200
Noise floor			
Broadband			
1 Hz to 10000 Hz	equiv. µg rms	2000	400
Spectral	equiv. µg/√Hz		
1 Hz		1500	300
10 Hz		200	50
100 Hz		30	10
1000 Hz		10	4
Grounding		Signal ground is connected to the case	
Sensitivity deviation versus current, 2 to 10 mA	%		±1
Power requirements			
Supply voltage	Vdc	+20 to +30 [2]	
Supply current	mV/pk	+2 to +20 [3]	
Warm-up time [4]	sec	< 2	
Digital communication (TEDS) device		DS2431X+u	
Environmental characteristics			
Temperature range			
Operating	°F (°C)	-67 to +257 (-55 to +125)	
TEDS communication	°F (°C)	+32 to +185 (0 to 85)	
Humidity		Hermetically sealed	
Sinusoidal vibration limit [5]	g pk	1000	
Shock limit [6]	g pk	5000	
Base strain sensitivity at 250µ strain	eq. g/µstrain	0.13	0.05
Thermal transient sensitivity	eq. g pk/°F	0.16	0.07
Electromagnetic noise	eq. g pk/°F	0.0001	0.00006

## Miniature TEDS accelerometer | Model 27F11 / F12

Physical characteristics			
Dimensions		See outline drawing	
Weight	oz (gram)	0.028 (0.8)	0.035 (1.0)
Case material		Titanium alloy	
Connector [7]		M3 receptacle, side mount	
Mounting [8]		Adhesive	
Calibration data supplied, each axis			
Sensitivity	mV/g		
Transverse sensitivity, maximum	%		
Frequency response	%	20 Hz to 10000 Hz	
	dB	10 kHz to 30 kHz	
Bias	Vdc		

Accessories			
Product	Description	27FXX	27FXX-R
3053VM1-120	Noise, Coaxial Cable Assembly, TPE Teflon Jacket, M3-plug to BNC Plug, 10 feet	Included	Optional
2943M1	Removal tool	Included	Optional
2987M9	Isolation mount	Included	Optional
32279	Mounting wax	Included	Optional
133	3 channel PE/IEPE signal conditioner	Optional	Optional


### Notes

- 23 Vdc minimum must be available to the accelerometer to ensure full scale operation at the temperature extremes.
- Supply voltage requirement of 20V - 30V at -55°C to +100°C, 23V -30V at -55°C to +125°C.
- Supply current requirement of 2mA - 20mA at -55°C to +100°C, 2mA
- 10mA at -55°C to +125°C.
- DC bias within 10% of final value.
- Destructive limit.
- Destructive limit. Shock is a one-time event. Shock pulses of short duration may excite transducer resonance. Shock level above the sinusoidal vibration limit may produce temporary zero shift that will result in erroneous velocity or displacement data after integration.
- Mates with Endevco model 3053VM1 cable.
- Be careful not to apply abusive forces when removing the accelerometer from a structure. Hammer taps and wrench "snaps" often impart permanent damage to the case and internal sensors.

### Ordering information:

- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Model number definition:

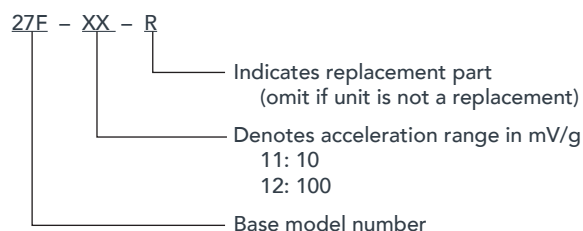

10869 NC Highway 903, Halifax, NC 27839 USA

endevco.com | sales@endevco.com | 866 363 3826

© 2022 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).

EDV-DS-27F11-F12-0922