


# Piezoresistive accelerometer

## Model 7280A

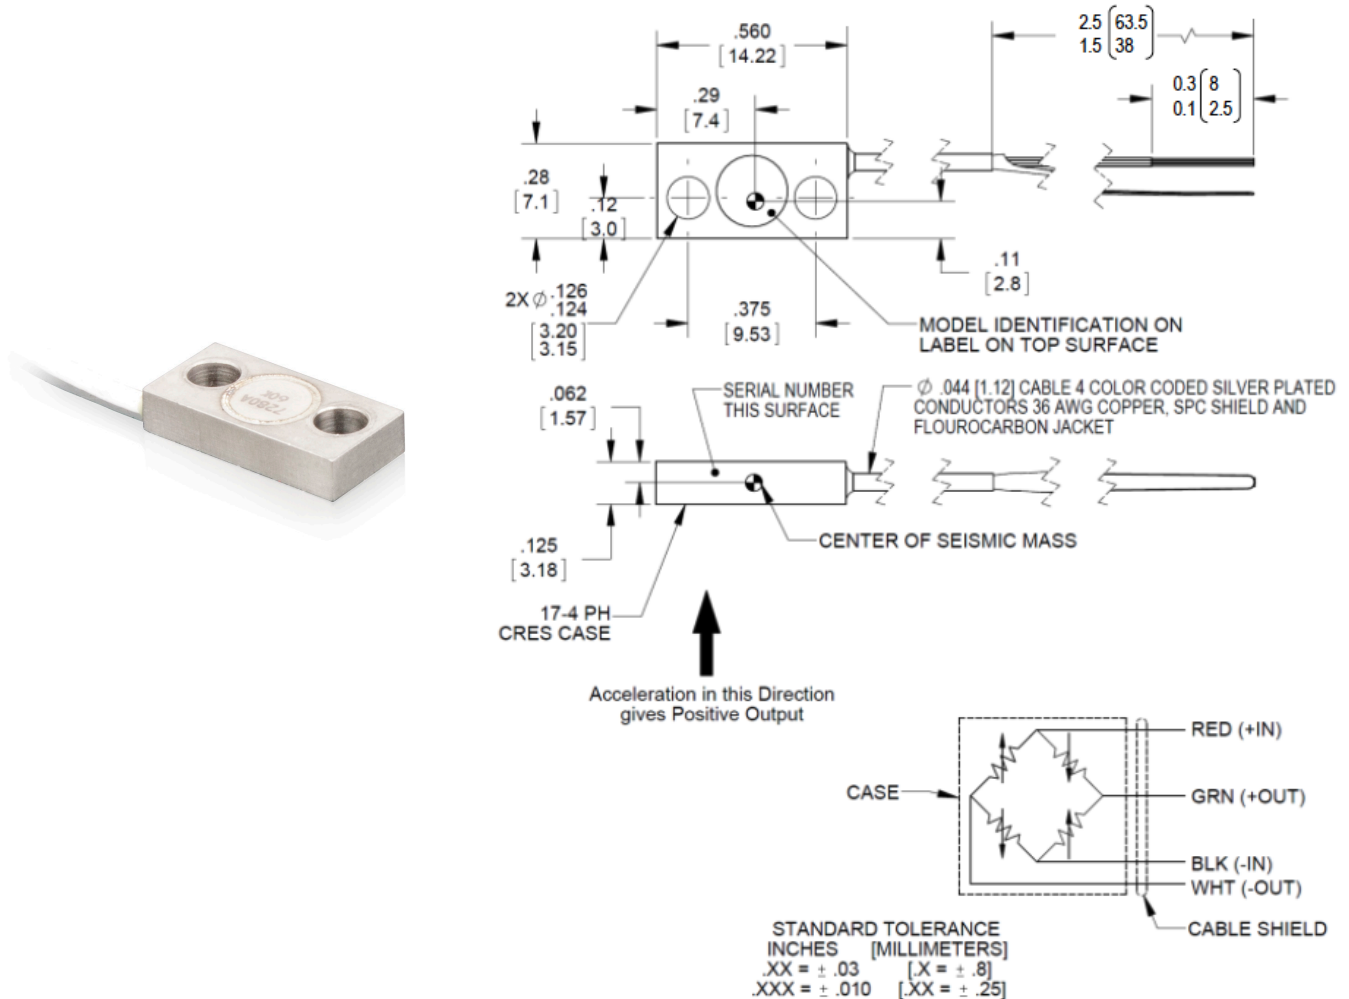

### Key features

- 2k, 20k and 60k g ranges
- Damped for exceptional survivability
- DC response
- Low power consumption
- -55°C to +121°C operating temperature
- Minimal zero shift after shock

### Description

Model 7280A is a family of rugged damped piezoresistive accelerometers designed for high amplitude acceleration, vibration and shock applications. The model 7280A features minimal mass loading, broad frequency response, and minimum zero shift during a shock event.

The model 7280A uses a unique micro-machined, piezoresistive sensor with gas damping to attenuate resonant amplitudes, and mechanical stops to reduce breakage under overload conditions. The monolithic sensor incorporates the latest MEMS technology for ruggedness, stability and reliability. The accelerometer features a four-active arm bridge circuit.

US patent 6,988,412 applies to this unit.

60,000 range is subject to International Traffic in Arms Regulations (ITAR), and as such a license is required for shipments outside the U.S. and other restrictions may apply.

# Piezoresistive accelerometer

## Model 7280A

### Specifications

All specifications are referenced at +75°F (+24°C) and 10 Vdc, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

<b>Dynamic characteristics</b>	<b>Units</b>	<b>-2K</b>	<b>-20K</b>	<b>-60K</b>
Range	g	± 2000	± 20,000	± 60,000
Sensitivity (at 5000g)				
Minimum/Typ/Max at 10Vdc	µV/g	150 / 300 / 600	8.0 / 16.0 / 24.0	2.5 / 5.0 / 7.5
Minimum/Typical/Maximum	µV/V/g	15 / 30 / 60	0.8 / 1.6 / 2.4	0.25 / 0.50 / 0.75
Frequency response ± 5.0% maximum	kHz	DC to 5 kHz	DC to 10 kHz	DC to 13 kHz
Natural frequency	kHz	25	100	130
Zero measurand output	mV/V	± 20	± 20	± 20
Transverse sensitivity	%	3	3	3
Thermal zero shift (typ)	%FSO/°C	0.06	0.06	0.06
	%FSO/°F	0.033	0.033	0.033
Thermal sensitivity shift (typ)	%/°C	- 0.2	- 0.2	- 0.2
	%/°F	- 0.11	- 0.11	- 0.11
<b>Electrical characteristics</b>				
Excitation	Vdc	2 to 12 (10 standard)		
Resistance				
input, minimum	Ω	4000 (4,500 for 2k)		
output, maximum	Ω	9000 (8,500 for 2k)		
Isolation resistance		100 MΩ min at 50 VDC between leads (shorted together) and cable shield or case.		
<b>Physical characteristics</b>				
Case material		17-4 CRES		
Weight (excluding cable)		1.4 grams		
Cable		(4) 36 AWG SPC, shield, FEP jacket; cable weight 0.04 oz/ft (1.13 g/ft)		
Mounting		4-40 high strength screws (x2) Recommended mounting torque, 8 ± 2 lbf-in (0.9 N-m)		
<b>Environmental</b>				
Acceleration limits (any direction)				
Shock		4x the rated range (5x for 2k)		
Temperature				
Operating	°C (F°)	- 55 to + 121 (- 67 to + 250)		
Storage	°C (F°)	- 55 to + 121 (- 67 to + 250)		
<b>Calibration data</b>				
Data for sensitivity, ZMO, input and output resistance are supplied on the calibration certificate. Unless specified by the customer at time of order, the default calibration will be performed at 10.0 Vdc excitation.				

# Piezoresistive accelerometer

## Model 7280A


### Accessories

Product	Description	7280A
EH137	[2] 4-40 high high strength screws	Included
EHW265	[2] No. 4 washers	Included
7970	Triaxial mounting block	Optional
31167	Mounting plate (10-32 stud adaptor)	Optional

### Notes

1. Model number definition:

7280A - XXX - YY - ZZZ

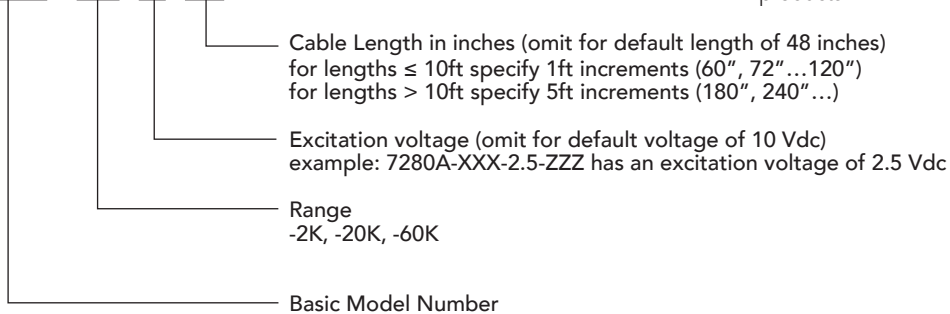

### Ordering information

1. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.